


Network Repeater (V3)

Features:

- Receives signal from the main master clock via TCP/IP and then wirelessly sends out the signal to the secondary clocks
- Perfect for multiple building or campus environments
- Either 915 - 928 MHz or 2.4 GHz frequency-hopping technology
- Transmits up to 1000 meters in open space
- Powerful 30dBm transmission
- Extremely slim design makes the Network Repeater versatile for mounting
- No need for custom back box
- FCC compliant, part 15, section 15,247
- Designed and Produced by Sapling Inc. in Pennsylvania, United States of America

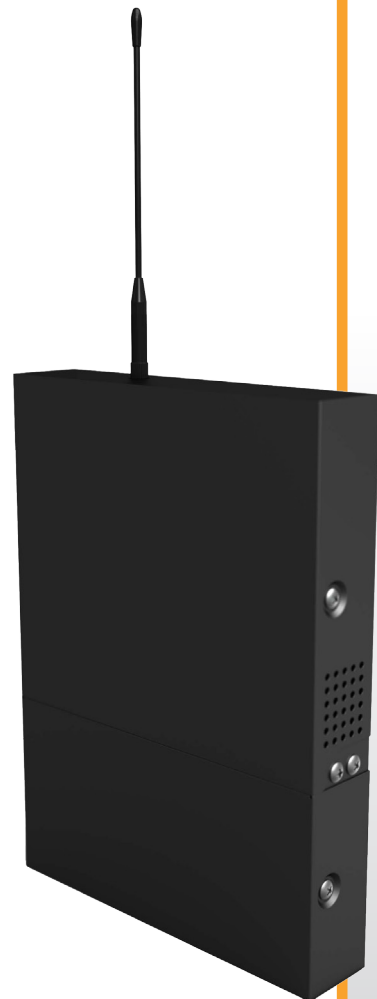

Specifications:

- Input voltage: 85 - 230 Volts AC
- Input: RJ45
- Input Source: SMA Series Master Clock
- RF Power Output: 30 dBm (1 watt)
- Frequency Range: Either 915 - 928 MHz or 2.4 GHz frequency-hopping technology

- Mounting: Wall mount
- Temperature Range:
 - Operating: 0°C - 50°C
 - Storage: -15°C - 70°C
- Housing: Smooth surface metal enclosure
- Color: Black
- Weight: 4 lbs. (1.81kg)
- Antenna Length: 7" (17.78 cm)
- Housing Dimensions: 11" x 8" x 1.7" (with bottom cover)
(LxWxD) 27.94 cm x 20.32 cm x 4.32 cm

- Compliance: FCC compliant, part 15, section 15,247

Ordering Information

Network Repeater

- SMA-1SM-0000-1: 915-928 MHz frequency
SMA-1SM-G000-1: 2.4 GHz frequency

Related Accessories

- SMA-1SR-0000-1 Wireless Repeater
SAG-1200 12" (30.48 cm) or 16" (40.64 cm) Round Analog Clocks or 12" Square Analog Clock Wire Guard
SDG-2017 2.5" (6.35 cm) or 4" (10.16 cm) Digital Clock Wire Guard

*specification sheets may change without prior notice



The Sapling Company, Inc. P. +1 215.322.6063
1633 Republic Road F. +1 215.322.8498
Huntingdon Valley, PA 19006 www.sapling-inc.com
USA