

NTP 7000 Series Server (V3)

Features:

- (S)NTP Server
 - Distributes time to all devices on the network, including IP clocks
- LED display for a clear, accurate readout
- (S)NTP Input Capability
 - Up to ten server addresses can be pre-programmed into the unit for continuous, accurate synchronization
 - DHCP Capable
- Interfaces with other systems
 - Interfaces with 59 and 58 minute correction, National Time and Rauland, as well as Dukane digital
- 12 or 24 hour mode
- Automatic bi-annual Daylight Saving Time changes (when used as a primary master clock)
- Bias seconds output
 - Adjust the time plus or minus a few seconds or minutes to fit your application, while still receiving an input from another source
- RS485 input and output for time correction and synchronization
- Two relays for simultaneous correction of two synchronous-wired clock systems
- Microprocessor based
- Ten year battery backup for timekeeping
- Web interface software
 - Extremely intuitive graphical user interface that allows the user to configure all of the settings of the NTP Server through a simple web interface
 - Control of all of the IP settings



Optional Features a la Carte:

- GPS input
- Wireless Transmitter/Repeater for correction of the SAL series analog clocks or SBL 3000 series digital clocks

Specifications:

- Time base: Crystal
- Voltage input: 85 VAC - 264 VAC, 50/60 Hz
- Current Consumption: 0.2A at 120V and 0.1A at 230V
- Power Consumption: 20 Watts
- Display: .56" (1.42 cm) LED display
- Color: Black
- Housing: Smooth surface metal case
- Temperature range
 - Operating: 0°C - 45°C
 - Shelf: -15° - 70°C
- Calendar: Built-in calendar with leap years
- Inputs: GPS (optional), SNTP, Wireless repeater, RS485, 58 minute correction, 59 minute correction, National Time and Rauland, Dukane digital
- Standby time keeping: Ten (10) years
- Memory: Non-volatile EEPROM
- Outputs: RS485 and 2 clock circuits
- Optional outputs: Sapling Wireless Communication (with transmitter option)
- Housing dimensions (LxWxD): 11" x 17.5" x 1.75" (27.94 cm x 44.45 cm x 4.45 cm)
- Mounting: Wall mount or rack mount
- Weight: 6.5 lbs. (2.95 kg)
- Includes: 1 - 6 foot (1.82 m) power cord
1 - Wall mount kit (wall mount only)
1 - Remote antenna (rack mount and transmitter option only)
1 - 75 foot (22.86 m) GPS cable (with GPS option)
1 - Dome antenna (with GPS option)

OPTIONS - Transmitter

- Input sensitivity: -112 dBm
- RF signal output: 30 dBm (1 watt)
- Transmission frequency: 915 - 928 MHz frequency-hopping technology (U.S. and Canada only)
2.4 GHz frequency for international only


OPTIONS - GPS

- Antenna: Thread mount bullet on 3/4" conduit
- Antenna dimensions: Diameter: 3.04" (7.72 cm)
Height: 2.94" (7.47 cm)
- Ethernet Speed: 10/100 Mbps Full Duplex
- Ethernet Port: RJ45
- Compliance: UL, cUL listed - FCC approved, part 15 section 15.247



Ordering Information

NTP 7000 Series Server

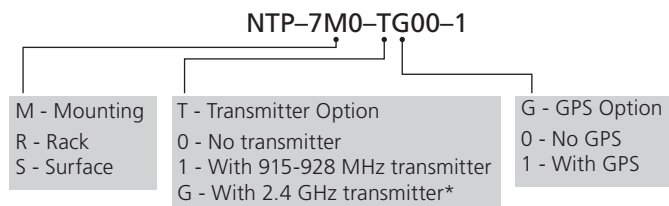

Examples:

- NTP-7R0-1000-1: NTP 7000 Series, rack mount, with 915-928 MHz transmitter, no GPS
 NTP-7S0-G100-1: NTP 7000 Series, surface mount, with 2.4 GHz transmitter, with GPS

* 2.4 GHz frequency range is only available for use outside the United States.

*specification sheets may change without prior notice



The Sapling Company, Inc. P. +1 215.322.6063
 1633 Republic Road F. +1 215.322.8498
 Huntingdon Valley, PA 19006 www.sapling-inc.com
 USA